

Ordering Information

Cat. No.	Finish	Lamps (by others)	Diameter	Depth
5230WH226U	Gloss White	(2) 26 W Quad Tube 4-Pin (G24q-3 base) General Electric Osram/Sylvania Philips F26DBXT4/SPX */4P CF26DD/E/ * PL-C26W/*/*4P *Manufacturers' color temperature designation.	16 1/4"	4 5/8"

Features

- Ceiling Pan:** Die-formed 16 ga. aluminum.
- Diffuser:** Formed white translucent acrylic.
- Bracket:** (2) Twist-lock fastener.
- Stop:** (2) Formed 18 ga. galvanized steel.
- Mounting Holes:** (3) 3/16" Dia., 120° apart on a 14 1/8" Dia. Bolt circle.
- Lamp Socket:** See Lamps.
- Ballast:** See Electrical/Ballast
- Keyhole Mounting Slots:** (2) For direct mounting to 4" octagonal outlet box.
- Emergency Lighting:** Add suffix **E** (See Specification Sheet SU-EM)
- Lamps:** (by others)

Electrical/Ballast

	Electronic 120/277V
Total Input Watts	53
Max. Line Current (Amps)	.46 / .21
Power Factor	>.98
Ballast Factor	1.0
THD	<10%
Min. Starting Temps.	-20°C (-4°F)


Label:

UL Listed, suitable for Damp Locations.
†UL Listed, (for Indoor Dry Locations only).


US Patent Pending.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

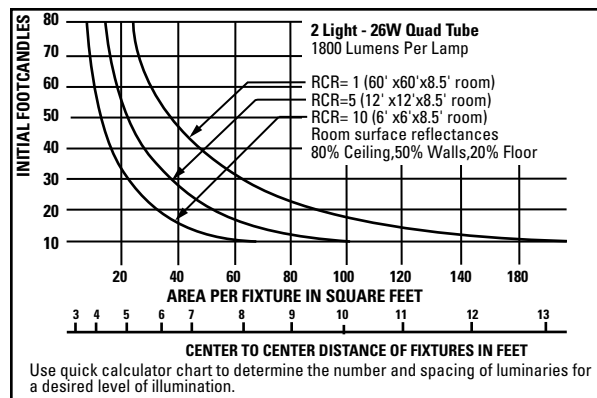

SPACING RATIO = 1.3

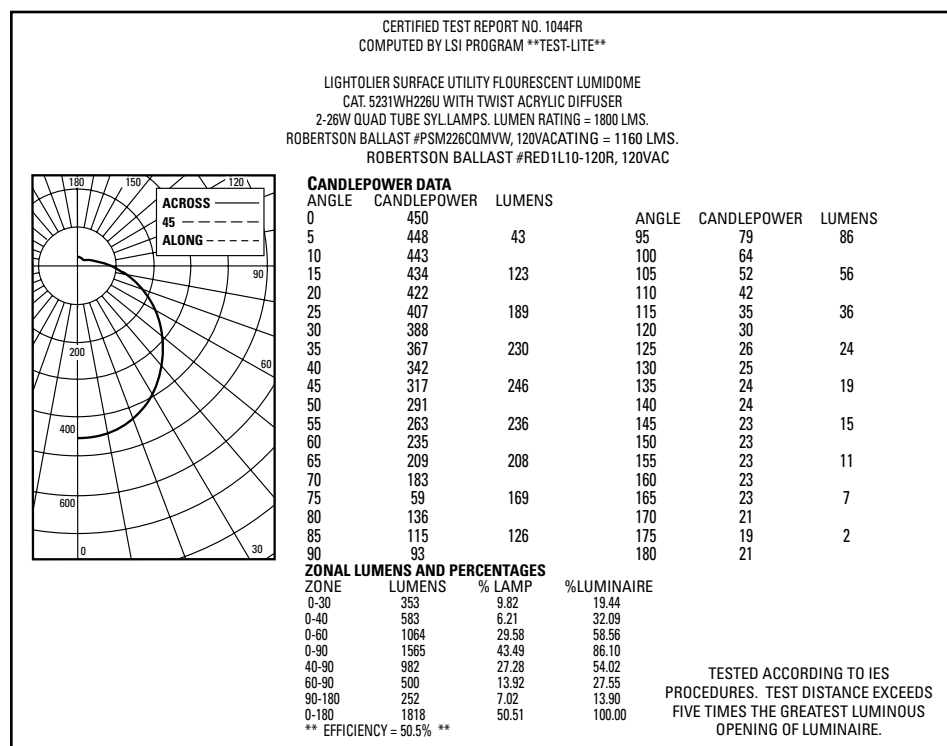

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD												
%EFFECTIVE FLOOR CAVITY REFLECTANCE = .20												
ROOM CAVITY RATIO	80			70			50			30		
	50	30	10	50	30	10	50	30	10	50	30	10
1	.50	.47	.45	.48	.46	.43	.44	.42	.41	.41	.40	.38
2	.43	.39	.36	.41	.38	.35	.38	.36	.33	.36	.34	.31
3	.37	.33	.30	.36	.32	.29	.34	.30	.28	.29	.27	.25
4	.33	.29	.25	.32	.28	.25	.30	.27	.24	.28	.25	.23
5	.30	.25	.22	.29	.24	.21	.27	.23	.20	.25	.22	.19
6	.26	.22	.19	.26	.21	.18	.24	.20	.18	.22	.19	.17
7	.24	.19	.16	.23	.19	.16	.21	.18	.15	.20	.17	.14
8	.21	.17	.14	.21	.17	.14	.19	.16	.13	.18	.15	.12
9	.20	.15	.12	.19	.15	.12	.18	.14	.12	.17	.14	.11
10	.18	.14	.11	.17	.13	.11	.16	.13	.10	.15	.12	.10

DETERMINED IN ACCORDANCE WITH CURRENT IES PUBLISHEDPROCEDURES

Job Information **Type:**

Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER